



Multifunction calibrator

FLOWCAL *Air*

USB

Main Characteristics:

- Reference calibrator to measure:
 - Flow
 - Absolute Pressure
 - Differential Pressure
 - Temperature ⁽¹⁾
- Flow calibrator with interchangeable measurement cells **Flowcell Air**, available in different ranges
- Possibility to use orifices calibrated from other samplers' brand (for ex. Tisch)
- High precision pressure calibrator, with thermal drift compensation device
- Creation of calibration report
- Creation of measurement log directly on the USB Key
- Power supply with alkaline batteries and/or rechargeable AA type, replaceable by customer
- Battery autonomy up to 90 hours
- Internal memory capability up to 256 report
- Available with ISO 17025 accredited laboratory certificate (optional)

(1) with optional temperature probe

Flowcal Air, more than a simple flow calibrator....

A single instrument allows to perform all necessary controls to verify the calibration of some parameters, which are normally measured by sampler, like flowrate, pressure and temperature. This characteristic makes Flowcal Air unique to test the accuracy of an instrument and to follow a quality system procedure.

Measurement traceability

This is very important to follow a quality system procedure. Flowcal Air generates a calibration report, containing the following data: cell in use, calibration expiration date, ambient conditions during verification test, deviations, test date and hour, etc. It is no longer necessary write paper reports.

Flowcal Air has an USB port: to download the report, simply insert and copy files onto a common USB key.



Sensor and measurement calibration have been performed with high accuracy and care. Each sensor is calibrated through an accurate procedure and is traceable to standards. Each instrument is supplied with a calibration certificate or, optionally, with ISO 17025 accredited laboratory certificate.

Immission Line 2.210.02

Flowrate cells FlowCell Air

The flowrate cells, Flowcell Air, are calibrated individually: each cell saves on its microchip all the information for the calibration traceability.

How to use the measurement cell

With Flowcal Air it is very simple: just connect the cell to the instrument and switch it on. Immediately the cell will be


recognized, therefore will be available for the flow measurement. Each cell has an ambient temperature sensor screened from the solar beam.

Cell models and characteristics

HI Flow Venturi

Range	: 150 - 600 l/min
Flow measurement accuracy	: 1% f.s.
Cell material	: Anodized alluminium
Built-in Temp. sensor accuracy	: better than 1% \pm 0.2 °C
Working temperature	: -20 +60 °C
Connection	: male fitting diam. 31.65mm
Applications	: Hi Volume samplers for micropollutants and PM10
Code	: AB99-008-0010SP

Hosebarb for Hi Flow cell : **AB99-008-9910SP**




Connection detail

MID Flow Venturi

Range	: 10 - 60 l/min
Flow measurement accuracy	: 1% f.s.
Cell material	: Anodized alluminium
Built-in Temp. sensor accuracy	: better than 1% \pm 0.2 °C
Working temperature	: -20 +60 °C
Connection	: female fitting diam. 31.75mm
Applications	: PM10/2.5 samplers, portable and isokinetic samplers
Code	: AB99-008-0011SP

Hosebarb for MID Flow cell : **AB99-008-9911SP**



Connection detail



Low Flow LF1060 (*)

Range	: 0.5 - 10.5 l/min
Flow measurement accuracy	: 1% f.s.
Cell material	: AISI 316 steel
Built-in Temp. sensor accuracy	: better than 1% \pm 0.2 °C
Working temperature	: -20 +60 °C
Connection	: threaded hosebarb 1/4" gas
Applications	: personal samplers, analyzers
Code	: AB99-008-0012SP

(*) Necessary the release of the software Flowcal v2.00



Immission Line 2.210.03

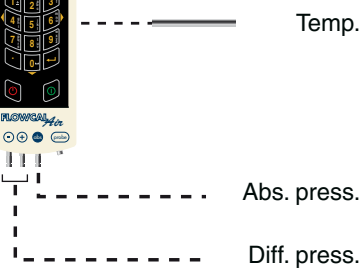

Connection to pressure and temperature sensors



Flowcal used with Tecora High Volume sampler, Echo Hi Vol



Carrying case

Technical specifications

Differential pressure

Range	0 - 2500 Pa (0 - 250 mmH ₂ O)
Accuracy	better than 1% of measure ± 2 Pa
Resolution	0.1 Pa (0.001 mmH ₂ O)
Differential pressure max	30 000 Pa (3000 mmH ₂ O)

Absolute pressure (static and barometric)

Range	0 - 105 kPa (1050 mBar) absolute
Accuracy	better than 1% of measure ± 0.1 kPa
Resolution	0.01 kPa (0.1 mBar)

Temperature pressure inlet

Range	-20 +80 °C
Resolution	0.01 °C
Accuracy	1% of measure ± 0.2 °C

General specifications

Working temperature	-20 +40 °C 95% UR
Power supply	n°4 alkaline batteries type AA (or rechargeable)
Battery autonomy	up to 90 hours
Display	Graphic LCD 128x64 pixel
Keypad	Membrane with tactile effect
USB Port	USB 1.0; 1.1 and 2.0
Weight	550 g (including batteries)
Dimensions	115 x 230 x 45 mm

Code for orders

FlowCal Air supplied with: - USB key 1 Gb - Carrying case - User's manual - Calibration certificate - 4 alkaline batteries type AA	AB99-008-0000SP
4 rechargeable batteries type AA	AC99-004-9931SR
Battery charger for rechargeable batteries	AC99-004-9930SR
Optional temperature probe inlet	AB99-008-0006SP
Temperature probe	AB99-008-0020SP